



TRA

■ MAIN FEATURES


- Small size and light weight offers high density P.C. Board technique.
- Free from dust, gases, humidity, etc. by employment of glass tube sealed reed switch for high reliability contact performance.
- Switching capacity from dry circuit use by 1A selectable to comply with wide applications.
- Fast response time in addition to short bouncing time to application associated with semiconductors like transistors, I.C. 's.



■ APPLICATIONS

- Communication equipment, domestic appliance, security equipment, office automation machine, etc.

■ ORDERING INFORMATION


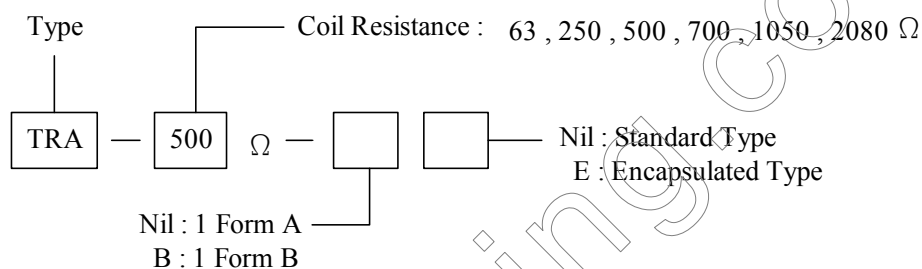


■ DIMENSION (unit:mm)


■ DRILLING (unit:mm)

■ WIRING DIAGRAM


Standard Type

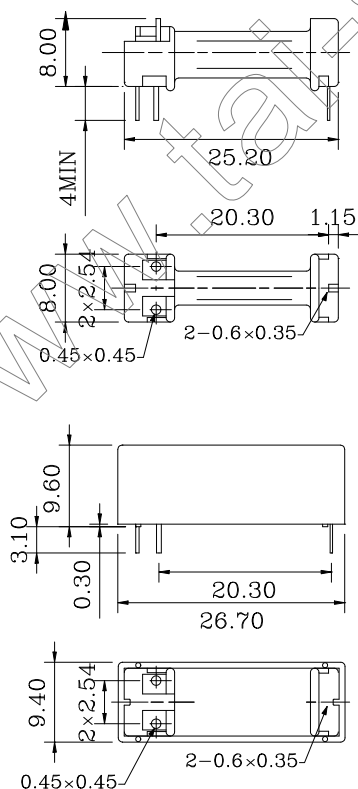

1A Contact Type



1B Contact Type



- 1.Coil Terminal (-)
- 2.Coil Terminal (+)
- 3.Reed Switch Terminal
- 4.Reed Switch Terminal

■ COIL DATA CHART (AT20°C)

Coil Sensitivity	Coil Voltage Code	Nominal Voltage (VDC)	Nominal Current (mA)	Coil Resistance (Ω) $\pm 10\%$	Power Consumption (W)	Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Max-Allowable Voltage (VDC)
TRA	03	3	47.6	63	abt. 0.1 to 0.28 W	70% Max.	10% Min.	160%
	06	6	24.0	250				
	09	9	12.9	700				
	12	12	11.4	1050				
	24	24	11.5	2080				
	05	5	10.0	500	abt. 0.05			

■ CONTACT RATING


Item	Type	TRA, H TYPE
Contact Capacity Resistive Load ($\cos\Phi=1$)		0.1A 125VAC 0.5A 24VDC
Rated Carrying Current		0.5A
Max. Allowable Voltage		120VAC 60VDC
Max. Allowable Current		0.5A
Max. Allowable Power Force		10VA 10W
Referenced Min. Applicable Load		1VDC 1mA

■ PERFORMANCE (at initial value)


Item	Type	TRA
Contact Resistance		150m Ω Max.
Operation Time		1.0msec Max.
Release Time		0.5msec Max.
Dielectric Strength		3000VDC(1 second)
Between coil & contact		200VDC(1 second)
Between contacts		
Surge Resistiveness		3000V(between coil & contacts 1 $\times$ 40 usec.)
Insulation Resistance		100-M Ω Min. (500VDC)
Max. ON/OFF Switching		
Mechanically		300 operation/min
Electrically		30 operation/min
Operating Ambient Temperature		-30 to +60°C (No water condensation and no water drop)
Operating Humidity		45 to 85% RH
Coil Temperature Rise		30 deg. Max. (at rated coil voltage)
Vibration		
Endurance		10 to 55HZ Double Amplitude 1.5mm
Error Operation		10 to 55HZ Double Amplitude 1.5mm
Shock		
Endurance		100G Min.
Error Operation		13G Min.
Life Expectancy		
Mechanically		50,000,000 ops. Min. (no load) 2,000,000 ops. Min. (at rated load)
Electrically		10,000,000 ops. Min. (6V 10mA)
Weight		abt. 4.5grs.
UL File No.		E156521

■ REFERENCE DATA

Coil Temperature Rise

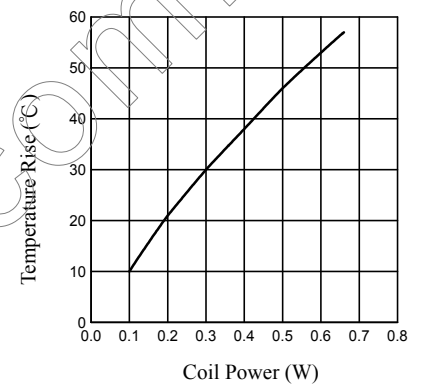

Operation Time

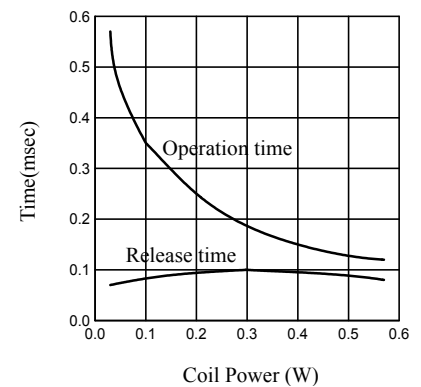

Life Expectancy

